

digiTHIN Q



ATTITUDE
ADAPTABLE
ATTRACTIVE

SOLID PERFORMER


Reliability and adaptability,
a system you can rely on to
deliver a stunning screen - you
can be confident it will deliver what it says on the tin.

Comes in 2 delicious flavours,
500x250 & 750x250mm

THE digiLED
SCREEN
EXPERTS



FIXING ORIENTATION OPTIONS

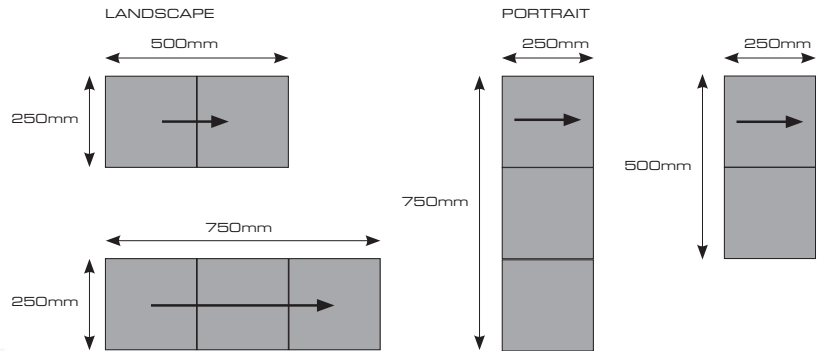

	Q1830	Q2600L	Q2600	Q3910HBL	Q3910HB
Physical Pixel Pitch (HxV) mm	1.838	2.604	2.604	3.906	3.906
Pixel Configuration	SMD 3-in-1				
LED Type/Face colour	2020/Black	2020/Black	2020/Black	1921/White	1921/White
Pixel Resolution (Width/Height) pixels/panel	272/136	288/96	192/96	192/64	128/64
Panel Dimensions (W x H x D) mm	500 x 250 x 52	750 x 250 x 52	500 x 250 x 52	750 x 250 x 52	500 x 250 x 52
Standard Panel Area m ²	0.125	0.1875	0.125	0.1875	0.125
Standard Panel Weight kg	4.2	5.5	4.2	5.5	4.2
Viewing Angles H/V	140/140				
Ingress Protection (Front/Rear)	Indoor IP20/IP20				
Maintenance Access	All Front				
Refresh Rate Hz	≥1,920				
Brightness (Normal) nits	>600	>800	>800	>2720	>2720
Enhanced Brightness nits	>800	>1,000	>1,000	>3,200	>3,200
Input Voltage VAC	110~240				
Max Panel Power Watts	95	95	60	112	75
Normal Input Power (Average) Watts/m ²	203	203	203	240	240
Normal Input Power (Maximum) Watts/m ²	507	507	507	600	600
Control System	NovaStar				
Mitering	By special order				
Certification	CE, FCC, ETL, EMC, LVD, RoHS				

Enhanced Brightness are subject to LED & driver IC selection - to be confirmed at the point of order.
 Peak (max.) input power figures are an approximation for guidance purposes only and should not be relied upon. Figures can change subject to LED type and brightness.
 Average figures are a typical assumption based on 30% of the peak value and may vary according to usage and media content shown.
 All specifications are correct at time of print, however they are liable to change and should be confirmed at point of order. E&OE.

