


# digiLED Toura Series

6mm, 10mm & 14mm AV Outdoor Rental Systems

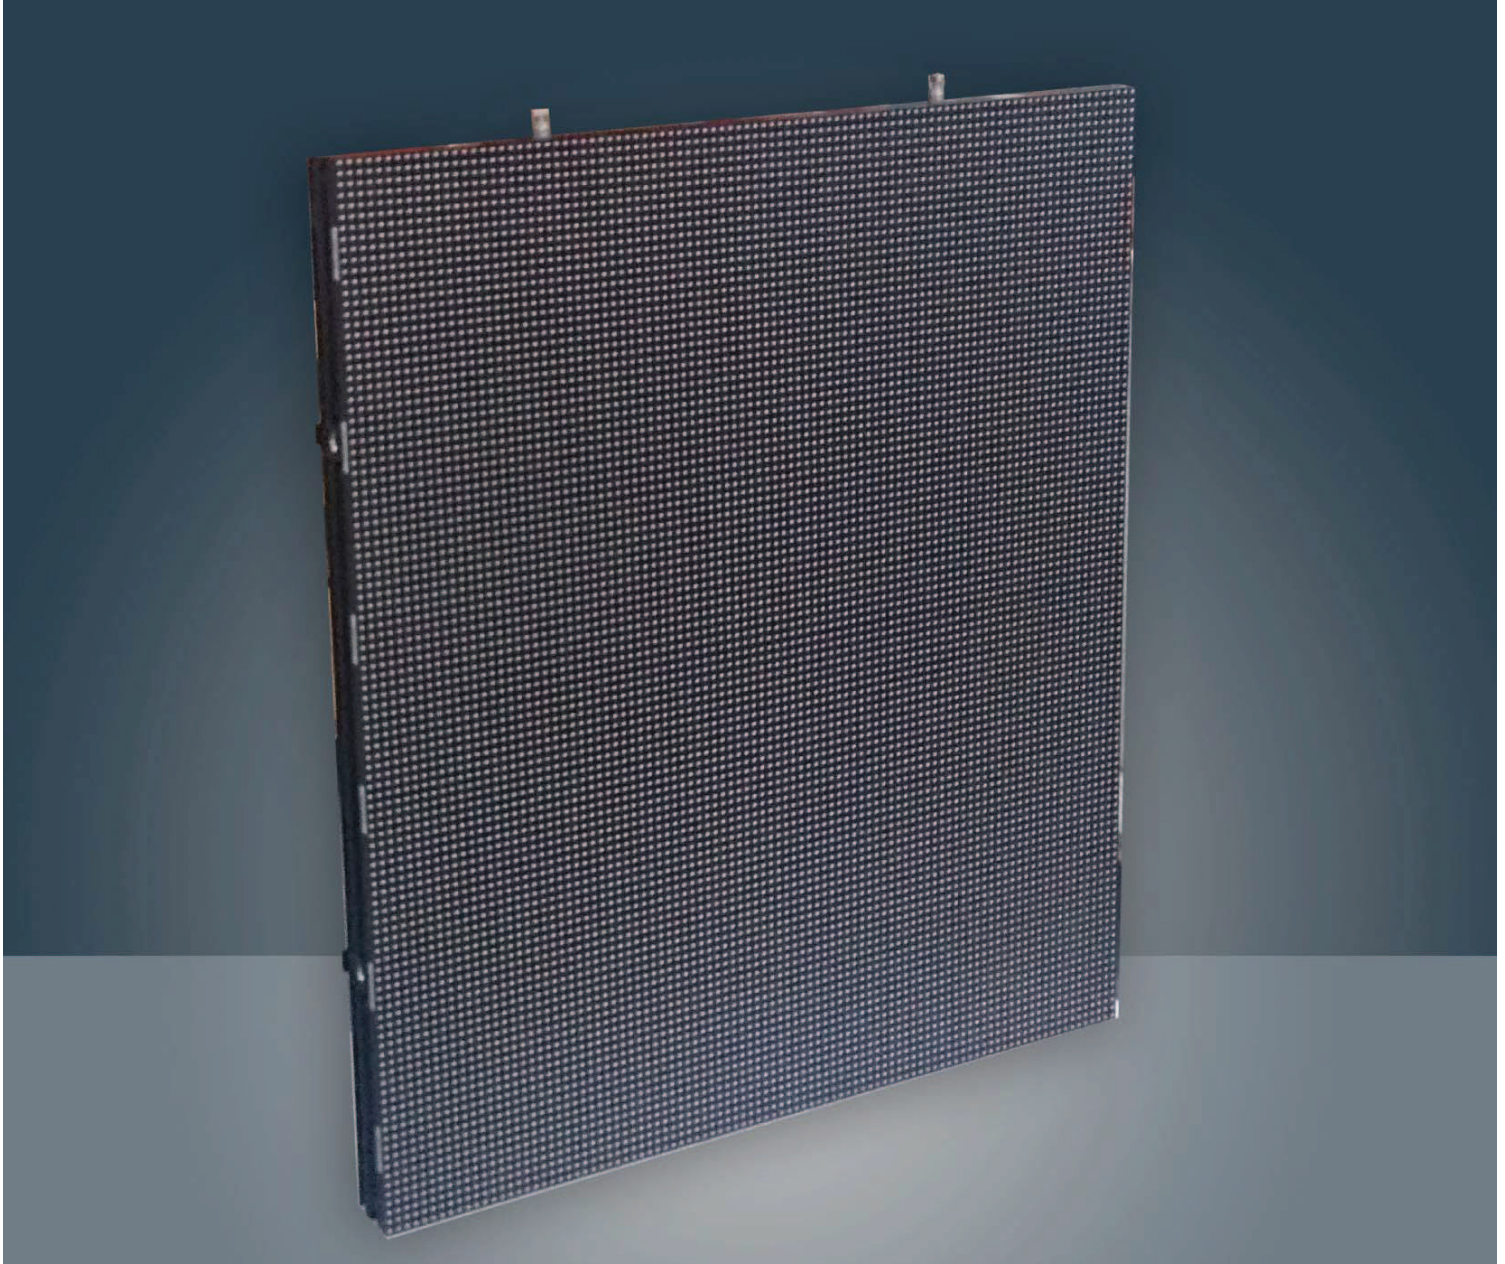


CE & ETL certified, hi-resolution ultra lightweight (22.7Kg per sqm) LED rental modules with options for super-sized touring frames of up to 2.16 sqm.

Fast-rig mechanics and built in ladder system make operation a breeze, whilst onboard calibration and a fantastic contrast ratio provide consistent punchy images even on the sunniest days.

VIDEO WALLTRONICS, INC.  
22 LUKENS DRIVE, NEW CASTLE, DE


302-328-4511  
WWW.RENTBIGSCREENS.COM

# MODULE SPECIFICATIONS - Toura Series




Product Name		Toura6	Toura10	Toura14
<b>LED</b>				
Pixel Configuration		SMD Z2727	SMD Z3535	SMD Z3535
LED Type			Black Edge	
LEDs Per Area	LEDs/m2	67,500	30,000	14,700
Physical Pixel Pitch	mm	6.6667	10	14.2857
Physical Pixel Resolution (Width)	pixels	120	80	56
Physical Pixel Resolution (Height)	pixels	135	90	63
Physical Pixel Resolution (Total)	pixels	16,200	7,200	3,528
Physical Pixels Per Area	pixels/m2	22,500	10,000	4,900
<b>MODULE</b>				
Standard Active Module Width	mm		800	
Standard Active Module Height	mm		900	
Standard Active Module Area	m2		0.72	
Module Depth	mm		65	
Module Weight	kg	18.4	18.4	17
LED Tile Width	mm		400	
LED Tile Height	mm		180	
Viewing Angle - Horizontal	degrees		>140	
Viewing Angle - Vertical	degrees		>110	
Ingress Protection	Front		IP65	
Ingress Protection	Rear		IP54	
Surface Finish			Aluminium	
LED Fixings			Front or rear access options	
Storage Temperature Range	degree C		-10 to +45	
Operating Temperature Range	degree C		-20 to +50	
Operating Humidity Range	%		10 to 90 Non-condensing	
<b>COLOUR</b>				
Processing Depth	colours		16bit	
Refresh Rate	Hz	>1,080	>2,520	>1,000
Grey Scale Levels		Independent Gain Control at low brightness		
<b>BRIGHTNESS</b>				
Brightness (After Calibration)	nits	>5,000	>5,000	>4,200
Brightness Control			Auto/Manual	
<b>POWER</b>				
Input Voltage	VAC		110/230	
Input Power (Max)	watts/m2	500	480	450
<b>OTHER</b>				
Lifespan	hours		>100,000	
Computer System Type			PC Win7, Vista, XP	
Video Input			DVI, HDMI	
Connection Method			HSYV	
Connectors			Waterproof Neutrik	
Control System			NovaStar	
Certification			CE/FCC/UL/EMC/FCC	
Enclosure Flame Retardancy Rate			V-O	

All specifications are correct at time of print, however they are liable to change and should be confirmed at point of order.



Integral unique locking system for easy side to side and hanging



Convenient IP54  
Neutrik Connections  
to the rear



VIDEO WALLTRONICS, INC.  
22 LUKENS DRIVE, NEW CASTLE, DE

302-328-4511  
WWW.RENTBIGSCREENS.COM

REV10/14.7.15/AC