



digiTILE Q

FIXED

**THE FIRST GENERATION OF
A UNIVERSAL LED TILE SCREEN SYSTEM**



A new generation of universal LED Tile screen system that has been developed to meet the demands of adaptability. Using a basic LED digiTILE with its magnetic fixings it is possible to assemble a screen swiftly onto any magnetic surface and connect each digiTILE to a PDP (Power Distribution Pack) mounted close by via an umbilical cord. With digiTILE, it is now possible to create a screen as thin as 60mm in depth.

The latest digiTILE product range has been developed to cater for the HD market which fits into the standard format module basics of 500x500mm format providing blistering HD quality both in performance and colour technology.



**VIDEO
WALLTRONICS, INC.**

22 LUKENS DR. NEW CASTLE, DE 19720
TEL. 302-328-4511 FAX 302-328-4558
WWW.RENTBIGSCREENS.COM

RENTAL - SALES - SERVICE - DESIGN - SINCE 1989

digiTILE Q FIXED outdoor

MODULE SPECIFICATIONS



		digiTILE Q 39100	digiTILE Q 52000	digiTILE Q 62500	digiTILE Q 100
LEDS					
Physical Pixel Pitch (HxV)	mm	3.906	5.208	6.250	10.4
LEDs Per Pixel				1R1G1B	
Red Wavelength (Dominant)	nm		620		
Green Wavelength (Dominant)	nm		520		
Blue Wavelength (Dominant)	nm		465		
PIXELS					
Pixel Configuration			SMD 3-in-1		
LED Face Colour			Black body		
LED Size		SMD1921	SMD2727	SMD2727	SMD2727
Physical Pixel Resolution (Width)	pixels/module	64	48	40	24
Physical Pixel Resolution (Height)	pixels/module	64	48	40	24
Physical Pixels Per Area (std Tile)	pixels/m2	65,536	36,864	25,600	9,216
MODULE					
Active Tile Width	mm		250		
Active Tile Height	mm		250		
Standard Active Module Area	m2		0.0625		
Tile Depth	mm		16		
Standard Tile Weight	kg		0.87 (0.19 for Cable)		
PDP Width x Length x Depth	mm		172.5 x 730 x 60		
PDP Weight	kgs		4.5		
Viewing Angle - Horizontal	degrees		> 140		
Viewing Angle - Vertical	degrees		> 120		
Ingress Protection (Front)			IP65		
Ingress Protection (Back)			IP54		
Surface Finish			Die-Cast Aluminium		
LED Fixings			Front access		
Storage Temperature Range	degree C		-10 to +50		
Operating Temperature Range	degree C		-10 to +50		
Operating Humidity Range	%		10 to 90 Non-condensing		
COLOUR					
Greyscale Processing Depth	bits		16		
Number of Colours			281 trillions		
Refresh Rate	Hz		> 3,840		
BRIGHTNESS					
Brightness (Before Calibration)	nits	> 6,500	> 6,500	> 6,500	> 5,500
Brightness (After Calibration) est.	nits	> 6,000	> 6,000	> 6,000	> 5,000
Brightness Control			256 Levels		
Contrast ratio			2,000:1		
POWER					
Input Voltage	VAC		110~240		
Input Power (Average)	watts/m2	240	240	259	201
Input Power (Maximum)	watts/m2	800	800	864	672
OTHER					
Lifespan	hours		> 100,000		
Computer System Type			PC Win10, Win7, Vista, XP, WIN2000		
Video Input			AV, S-Video, VGA, DVI, HDMI, YPbPr, SDI		
Data Input Connector			Ethernet, Fibre Optic		
Power Input Connector			Flying lead		
Control System			NovaStar		
Certification			CE, EMC, RoHS		

All specifications are correct at time of print, however they are liable to change and should be confirmed at point of order



**VIDEO
WALLTRONICS, INC.**

22 LUKENS DR. NEW CASTLE, DE 19720
TEL. 302-328-4511 FAX 302-328-4558
WWW.RENTBIGSCREENS.COM



RENTAL - SALES - SERVICE - DESIGN - SINCE 1989

REV05/13.12.17/AC

digiTILE Q FIXED indoor

MODULE SPECIFICATIONS



		digiTILE Q 2600	digiTILE Q 3125	digiTILE Q 3910
LEDS				
Physical Pixel Pitch (HxV)	mm	2.604	3.125	3.906
LEDs Per Pixel			1R1G1B	
Red Wavelength (Dominant)	nm		620	
Green Wavelength (Dominant)	nm		520	
Blue Wavelength (Dominant)	nm			465
PIXELS				
Pixel Configuration			SMD 3-in-1	
LED Face Colour			Black body	
LED Size		SMD1515	SMD2020	SMD2020
Physical Pixel Resolution (Width)	pixels/module	96	80	64
Physical Pixel Resolution (Height)	pixels/module	96	80	64
Physical Pixels Per Area (std Tile)	pixels/m ²	147,456	102,400	65,536
MODULE				
Active Tile Width	mm		250	
Active Tile Height	mm		250	
Standard Active Module Area	m ²		0.0625	
Tile Depth	mm		16	
Standard Tile Weight	kg		0.87 (0.19 for Cable)	
PDP Width x Length x Depth	mm		172.5 x 730 x 60	
PDP Weight	kgs		4.5	
Viewing Angle - Horizontal	degrees		> 140	
Viewing Angle - Vertical	degrees		> 140	
Ingress Protection (Front)			IP65	
Ingress Protection (Back)			IP54	
Surface Finish			Die-Cast Aluminium	
LED Fixings			Front access	
Storage Temperature Range	degree C		-10 to +50	
Operating Temperature Range	degree C		-10 to +50	
Operating Humidity Range	%		10 to 90 Non-condensing	
COLOUR				
Greyscale Processing Depth	bits		16	
Number of Colours			281 trillions	
Refresh Rate	Hz		> 3,840	
BRIGHTNESS				
Brightness (Before Calibration)	nits	> 1,200	> 1,200	> 1,300
Brightness (After Calibration) est.	nits	> 1,100	> 1,100	> 1,150
Brightness Control			256 Levels	
Contrast ratio			4,000:1	
POWER				
Input Voltage	VAC		110~240	
Input Power (Average)	watts/m ²	230	172	187
Input Power (Maximum)	watts/m ²	768	576	624
OTHER				
Lifespan	hours		> 100,000	
Computer System Type			PC Win10, Win7, Vista, XP, WIN2000	
Video Input			AV, S-Video, VGA, DVI, HDMI, YPbPr, SDI	
Data Input Connector			Ethernet, Fibre Optic	
Power Input Connector			Flying lead	
Control System			NovaStar	
Certification			CE, EMC, RoHS	

All specifications are correct at time of print, however they are liable to change and should be confirmed at point of order



**VIDEO
WALLTRONICS, INC.**


22 LUKENS DR. NEW CASTLE, DE 19720
TEL. 302-328-4511 FAX 302-328-4558
WWW.RENTBIGSCREENS.COM




RENTAL - SALES - SERVICE - DESIGN - SINCE 1989

REV05/13.12.17/AC

digiTILE Q FIXED TILE DETAIL

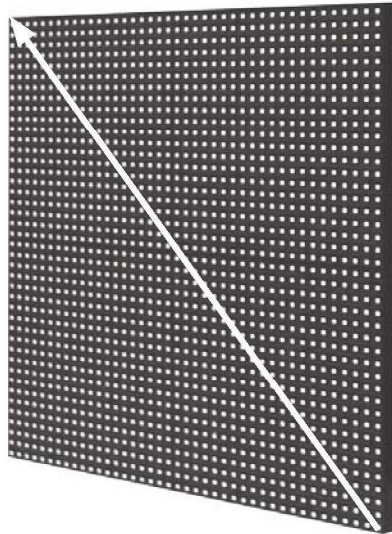

digiTILE Q
Aspect Ratio 1:1

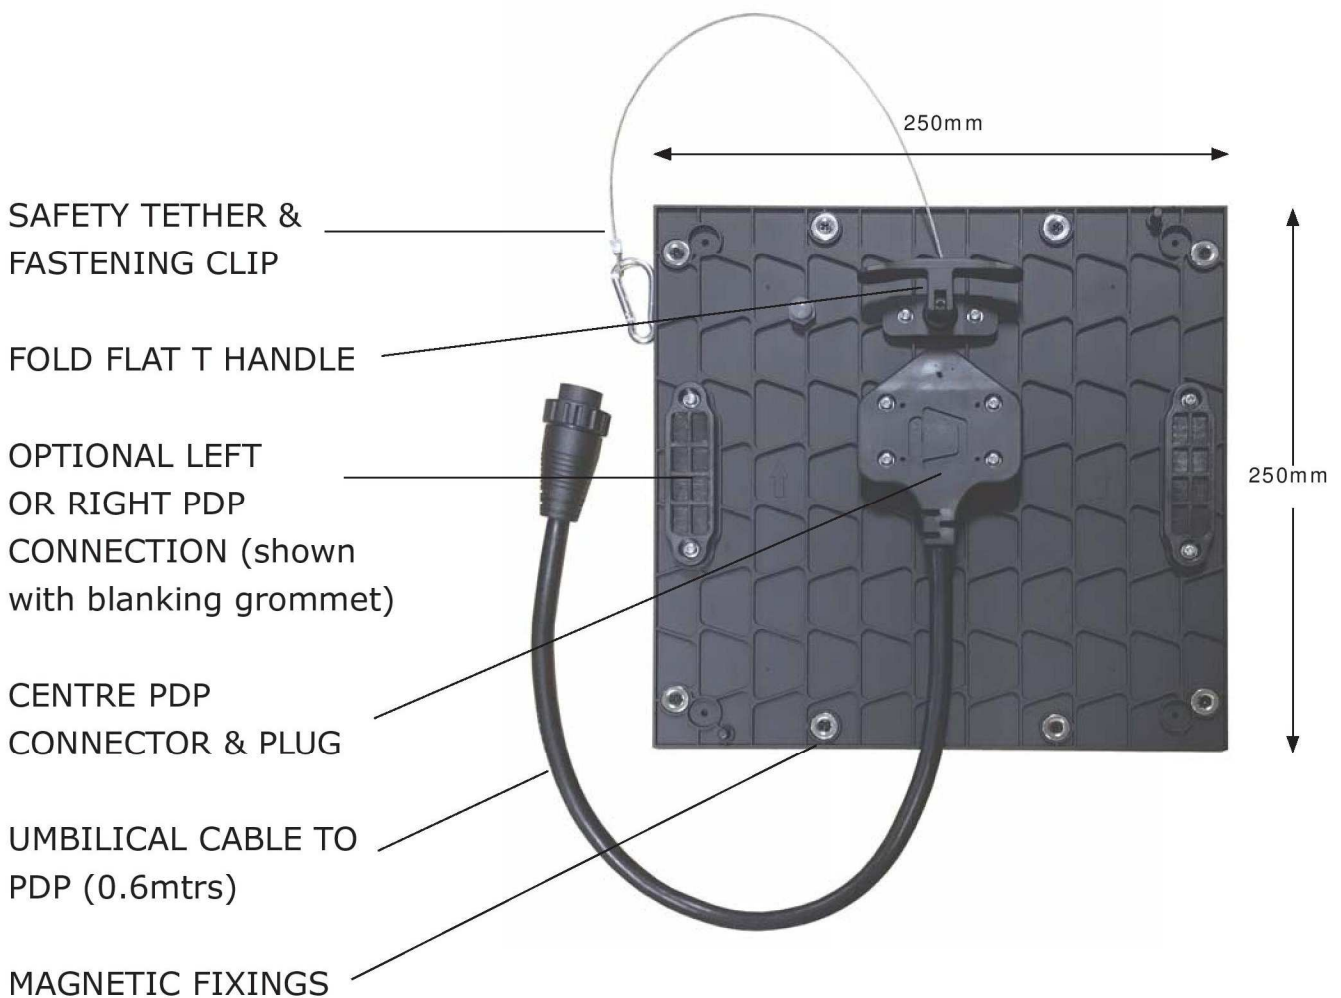

**VIDEO
WALLTRONICS, INC.**

22 LUKENS DR. NEW CASTLE, DE 19720
TEL. 302-328-4511 FAX 302-328-4558
WWW.RENTBIGSCREENS.COM

RENTAL - SALES - SERVICE - DESIGN - SINCE 1989



digiTILE Q FIXED PDP DETAIL

digiTILE PDP6

STATUS INDICATOR PANEL


REAR DOOR

LOCK

POWER CONNECTION

UMBILICAL PDP
CONNECTION SOCKET FOR A
2 x 3 TILE ARRANGEMENT

WEATHERPROOF CONNECTOR COVER
(outdoor versions)

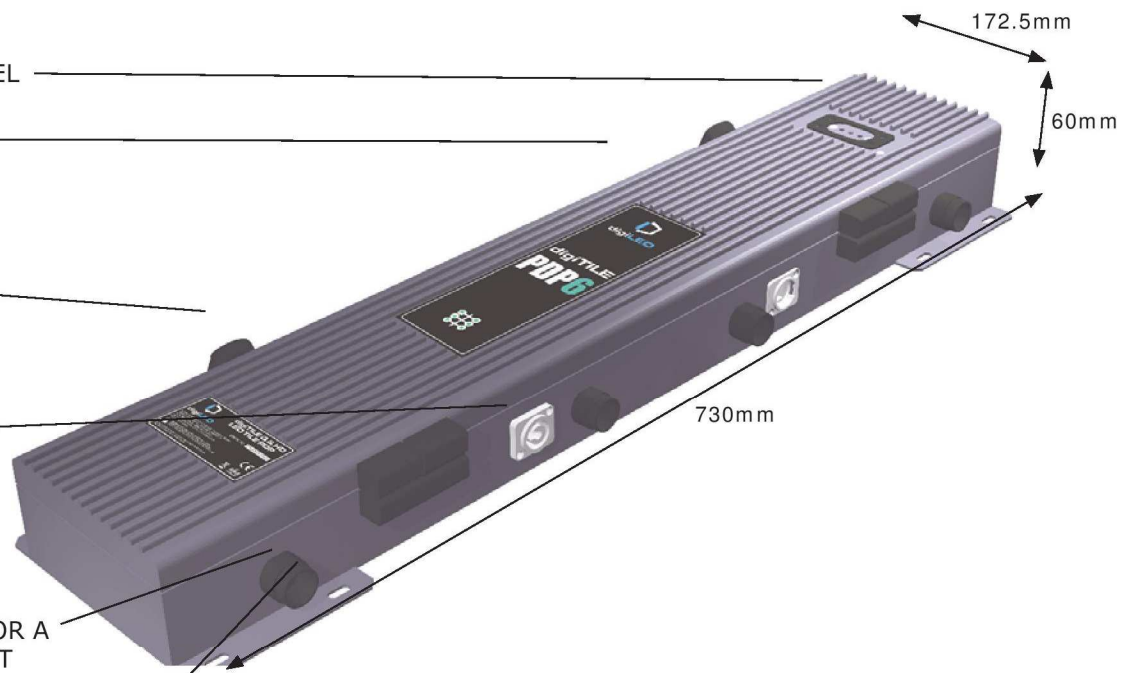

digiTILE PDP8

STATUS INDICATOR PANEL


REAR DOOR

LOCK

POWER CONNECTION

UMBILICAL PDP
CONNECTION SOCKET FOR A
2 x 4 TILE ARRANGEMENT

WEATHERPROOF CONNECTOR COVER
(outdoor versions)

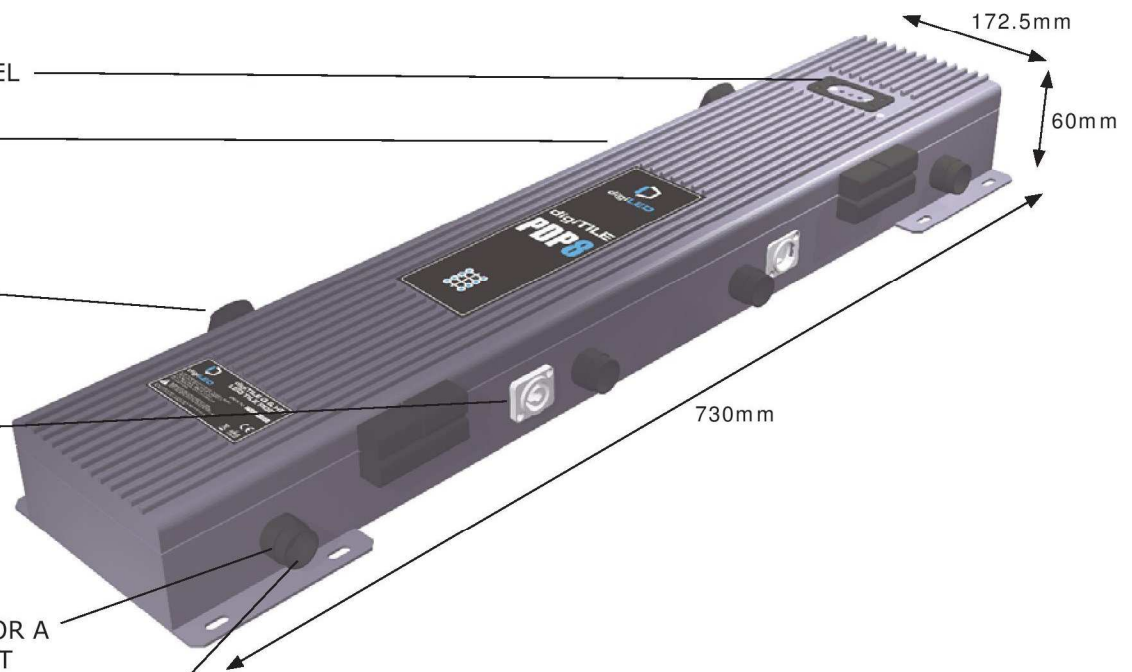

**VIDEO
WALLTRONICS, INC.**

RENTAL - SALES - SERVICE - DESIGN - SINCE 1989

22 LUKENS DR. NEW CASTLE, DE 19720
TEL. 302-328-4511 FAX 302-328-4558
WWW.RENTBIGSCREENS.COM

